



ARDEX DOUBLE STICK SYSTEM FOR CARPET INSTALLATIONS




ARDEX AF 825
SURFACE
TACKIFIER



ARDEX AF 325
LOW EMISSION
CARPET
ADHESIVE

ARDEX DOUBLE STICK SYSTEM FOR CARPET INSTALLATIONS

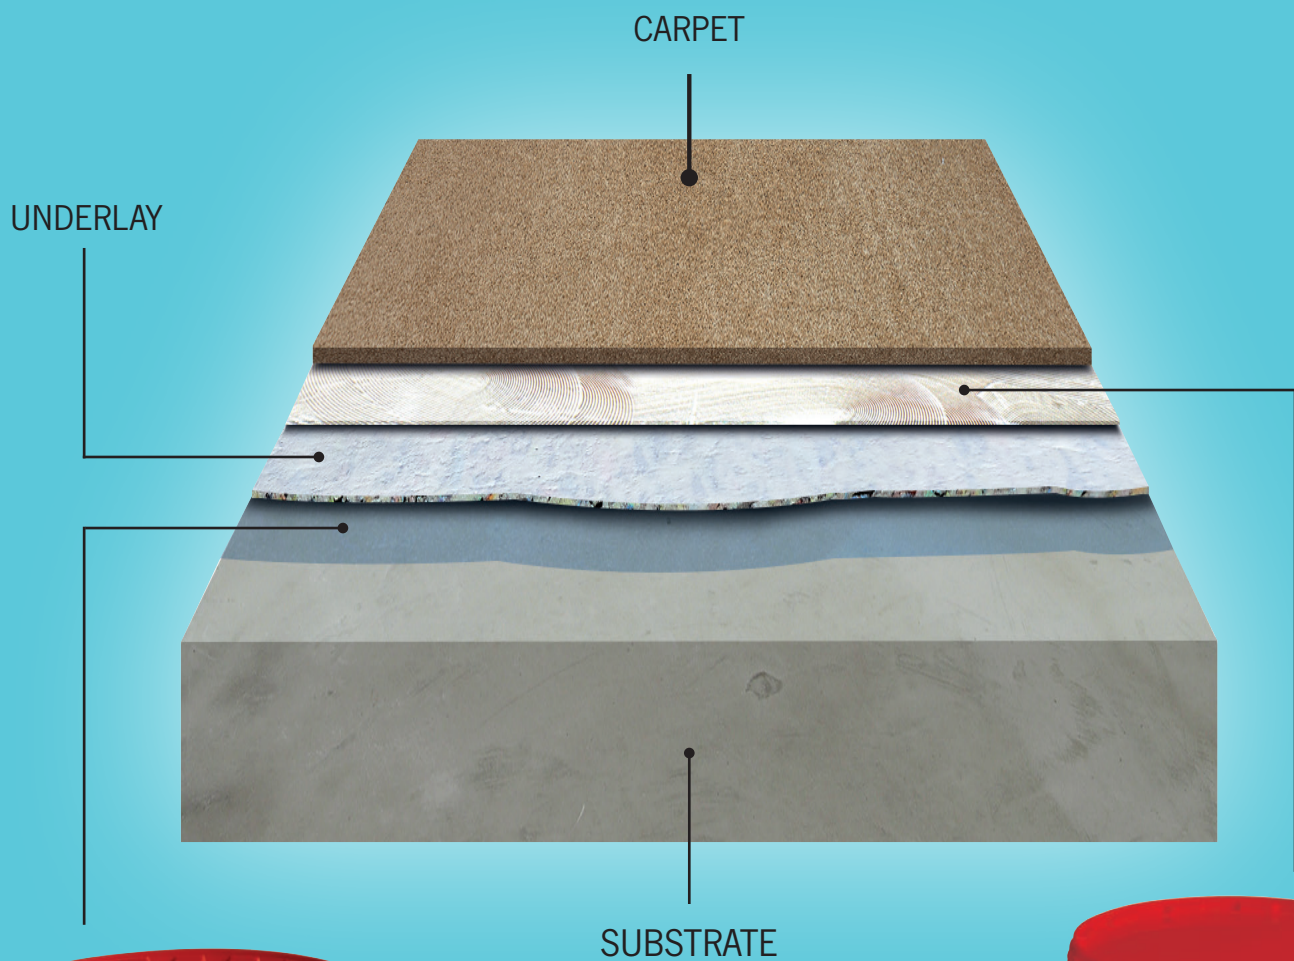

ARDEX AF 825
SURFACE TACKIFIER



ARDEX AF 325
LOW EMISSION CARPET
ADHESIVE

ARDEX AF 825 - SURFACE TACKIFIER



10kg

- Install floorcoverings in as little as 10 minutes, or up to 24 hours after application
- Instant release allows you to easily remove the installation when a replacement is necessary
- High temperature resistance, suitable for use over underfloor heating systems
- Extremely low odour
- Solvent free
- Covers up to 125m²




ARDEX AF 825 meets the requirement guidelines for the EMICODE licence 'EC1 PLUS', achieving the lowest possible emission limits.

Suitable for:

- Carpet Underlay*
- Gel Backed Carpet Tiles
- PVC Carpet Tiles
- Bitumen Backed Carpet Tiles

*Double Stick Method

INSTALLATION SCHEDULE

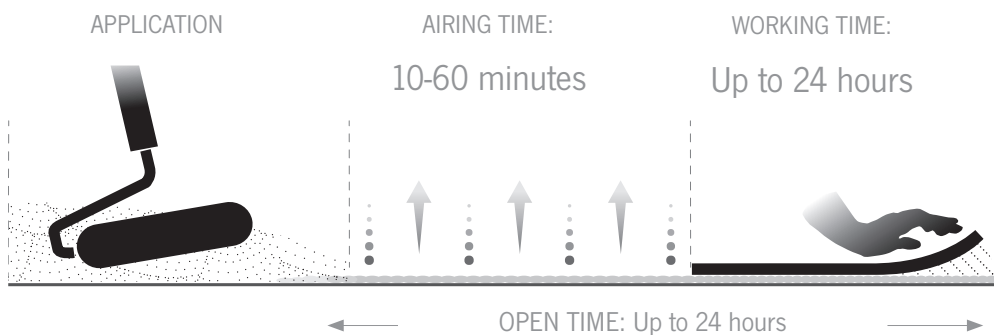

Times dependent on the absorbency of the subfloor and site conditions.

LEGEND

AIRING TIME

The time the adhesive must be left open before applying the floorcovering.

WORKING TIME

The time in which the adhesive can receive the floorcovering, after the initial airing time.

OPEN TIME

The combination of airing and working time.

ARDEX AF 325 - LOW EMISSION CARPET ADHESIVE



- Excellent early grab means that carpets can be installed in as little as 5 minutes
- Up to 30 minute extended working time
- Excellent adjustment time allowing you to adjust and reposition carpets with ease
- High temperature resistance, suitable for use over underfloor heating systems
- Solvent free
- Low odour
- Covers up to 35m²




ARDEX AF 325 meets the requirement guidelines for the EMICODE licence 'EC1 PLUS', achieving the lowest possible emission limits.

Suitable for:

- ✓ Woven
- ✓ Actionbac
- ✓ Latex
- ✓ Gel Foam
- ✓ Needle Punch/Fibre Bonded
- ✓ PVC
- ✓ Secondary Backed
- ✓ Felt

INSTALLATION SCHEDULE

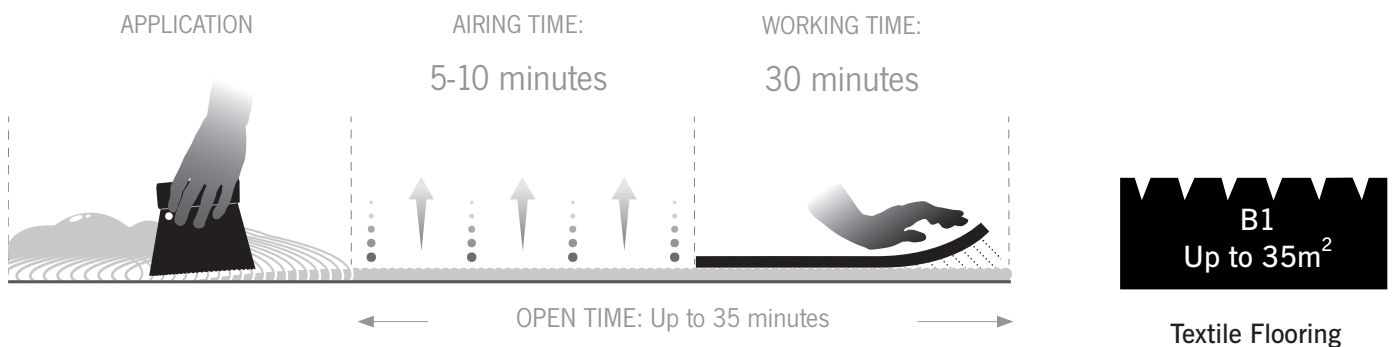

Times dependent on the absorbency of the subfloor and site conditions.

LEGEND

AIRING TIME

The time the adhesive must be left open before applying the floorcovering.

WORKING TIME

The time in which the adhesive can receive the floorcovering, after the initial airing time.

OPEN TIME

The combination of airing and working time.

1



Ensure the floor is hard, dry, clean, free from barrier materials, sound and smooth. Any dust should be removed using suitable vacuum equipment, prior to applying ARDEX AF 825, as it can affect both the coverage and performance of the adhesive.

Select a suitable underlay for double stick installations.

Cut the underlay slightly bigger than the room and pull one half back to the middle, ready to install half the underlay.

2



Apply ARDEX Surface Tackifier with a short pile roller and leave for the recommended airing time of between 10-60 minutes, until tacky.

Note: Very absorbent surfaces may require priming

3



Lay the underlay into the aired tackifier, remove any air pockets with a cork board or rubbing tool and trim any excess underlay.

Repeat the process on the other half of the room.

4



Lay the carpet out in the room, pull back half the carpet and apply ARDEX AF 325 Low Emission Carpet Adhesive to the surface of the underlay.

Allow the adhesive to air for 5 minutes, before dropping the carpet into adhesive. Repeat the process for the other half of the room.

5



A carpet glider should be used to make sure a good transfer is received between the carpet, adhesive and the underlay.

A tucking tool is ideal for ensuring the carpet is correctly bonded to the edge of the room.

Visit www.ardex.co.uk to view the latest adhesive application videos.

FOR THE PERFECT FLOOR

The ARDEX range of High Performance Flooring products have been developed, tested and approved to be fully compatible with today's most popular floorcoverings; offering the professional installer unique application benefits and guaranteed long term performance, helping to ensure the perfect installation every time.


REPAIR



PROTECT



LEVEL & SMOOTH

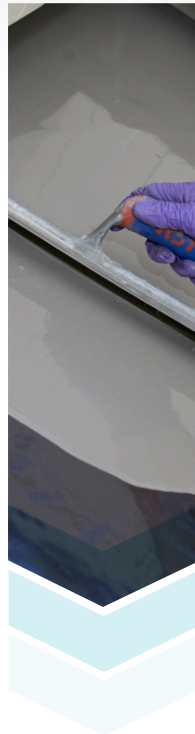

INSTALL



REPAIR
MORTARS



MOSITURE CONTROL
& PRIMING



LEVELLING AND
SMOOTHING
COMPOUNDS



FLOORING ADHESIVES

To view our full range of high performance flooring products visit

www.ardex.co.uk



ARDEX UK Limited

01440 714939



@ARDEXUKFlooring

info@ardex.co.uk



ARDEX UK

www.ardex.co.uk



ARDEX UK