


RAPID DRYING INDUSTRIAL TOPPING/WEARING SURFACE

ARDEX K 80

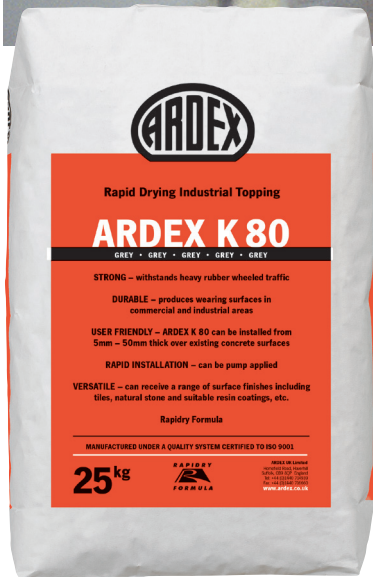

ARDEX K80 is a specially formulated cement-based compound for resurfacing and levelling existing concrete floors to give a hard, smooth, flat, wearing surface or as a base for suitable paint and resin coatings.

- Withstands heavy wheeled traffic and has AR1 abrasion resistance
- Wearing surface for industrial and commercial areas
- 5mm - 10mm over existing concrete surfaces
- Can receive a range of surface finishes including suitable resin coatings, tiles and natural stone and paint
- EN 13813 Cementitious Screed

RAPIDRY
FORMULA



Installation Schedule

APPLICATION DEPTH:
5-10mm



WORKING TIME:
30 minutes




WALK ON:
2 hours



DRYING TIME:
24 hours



COVERAGE:
**3m² at 5mm
thick per 25kg**



Pack Size



Suitable for:

- ✓ Workshops
- ✓ Warehouses
- ✓ Stores
- ✓ Factories
- ✓ Light industrial traffic