


PENETRATING SCREED RENOVATION SYSTEM

ARDEX PSRS

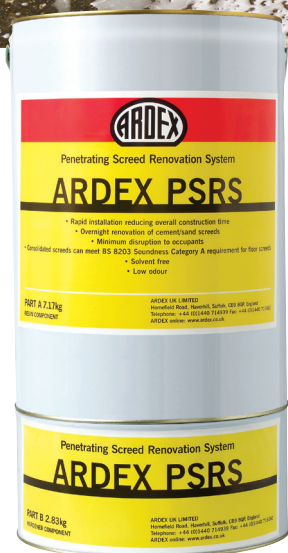


- Penetrates into the defective screed, filling voids resulting from poor compaction
- Ideal for overnight renovation of screeds
- Consolidates screeds to BS-8204-1 Soundness Category A
- Low odour and solvent free

ARDEX PSRS is an ultra-low viscosity, solvent free, two component, epoxy resin; designed for strengthening and restoring poorly compacted and low strength cement/sand screeds that do not meet the required in-situ crushing resistance value when tested.

Installation Schedule

APPLICATION DEPTH:
Variable



WORKING TIME:
20 minutes




WALK ON:
4 hours




OVER COAT TIME:
4-24 hours



COVERAGE:
3-5kg per m²



Pack Size



Suitable for:

- ✓ Poorly compacted and low strength cement/sand screeds